


- ◆ **Automatic Edge Finding Cut/Back Cut**
Automatic scanning of material edge, positioning and cutting.
- ◆ **Accurate Tool Alignment System**
Through pressure sensor system, precise control of the depth of the tool.
- ◆ **High-end 6 Axis High Speed Motion Control System**
Using the replaceable tool mode and selecting appropriate tools, intelligent cutting of various materials can be realized quickly and accurately.
- ◆ **Independent Vacuum Adsorption**
6 independent vacuum adsorption areas, strong adsorption, precise cutting.



Flexo application

Intelligent Integrated Cutting Solution

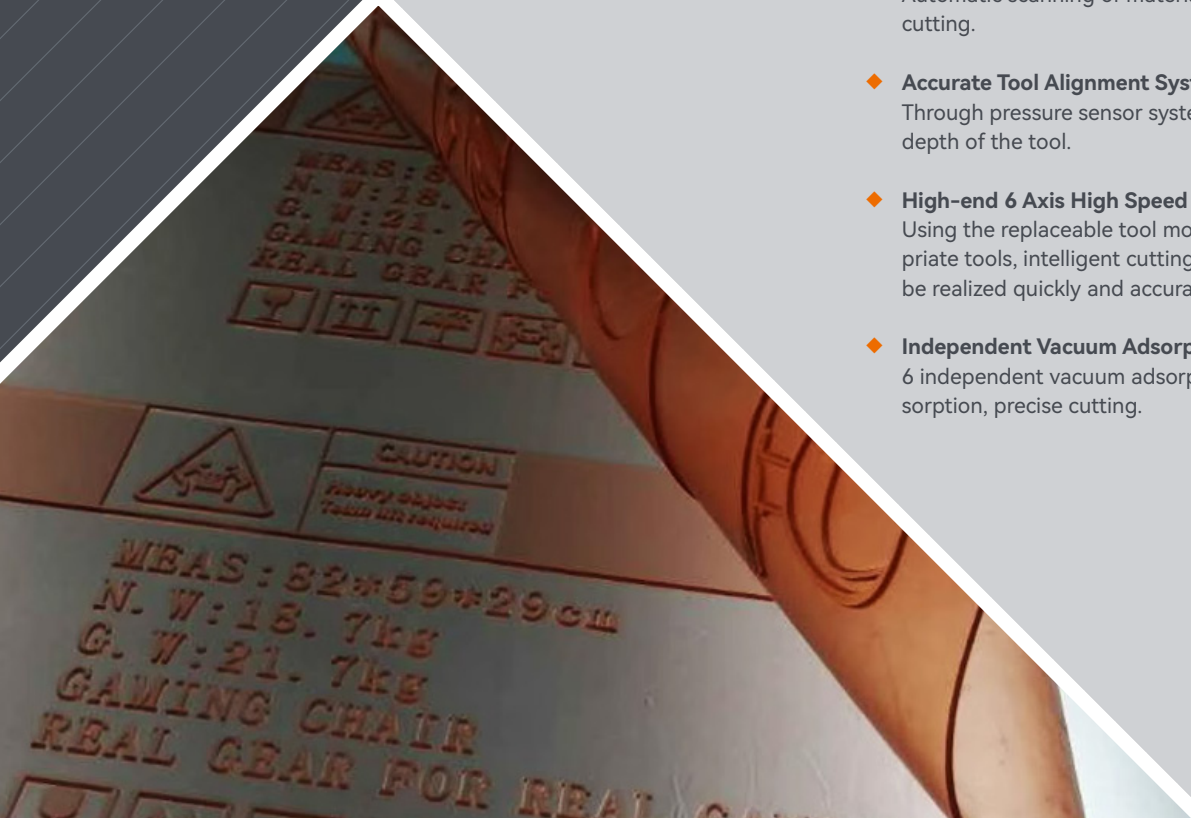

E-CUTTER CB03II-1113


Product Introduction




Cardboard



Grey board



Corrugated



EPE Foam



PP board



Flexo

Materials

CB03II-1113 Packaging cutting intelligent integrated cutting solution, compatible with a wide range of materials, can cut a variety of cardboard.

Tools



Electric Oscillating Tool

Electric Foam Cutting Tool

Electric Rotary Tool

Kiss-cut Tool

Router Tool

Centered/Off-centered Drag Knife

Press Cutting Tool

V-CUT Tool For Honeycomb

V-CUT Tool For Grey Board

V-CUT Tool For Flexo

V-CUT Tool For Cardboard

Creasing Wheel Tool

Parameters

JWEI reserves the right of final interpretation of the following parameters, subject to change without prior notice.

Model	CB03II-1113
Multi-functional Tool Head	Easy to change different tool heads. Engraving and router. Oscillating thorough cutting/Kiss cutting/Creasing/Plotting/Laser positioning and precision camera registration.
Tools	Various kinds of cutting blades, different size of creasing wheels and plotting pen etc.
Safety Device	Infrared sensor, responsive, safe and reliable.
Max. Cutting Speed	1500mm/s (Depends on different kinds of materials)
Max. Cutting Thickness	50mm (Customize according to different materials)
Repeat Precision	±0.05mm
Cutting Materials	Cardboard, grey board, KT board, PVC board, honeycomb board, car stickers, lamp pieces, PP back glue, printing cloth, flag banner, all kinds of corrugated paperboard, EPE foam, EVA, PVC board, acrylic board, thick foam, etc.
Material Fixation Mode	Smart optional intelligent multi-zone vacuum suction
Servo Resolution	±0.01mm
Transmission Mode	Ethernet port
Drive System	High-end digital servomotor, imported linear guide, synchronous belt, lead screw
Rated Power	7.5kW
Rated Voltage	380V±10%
Effective Cutting Size	1100mm×1300mm
Machine Size	2250mm×2320mm×1280mm

NINGBO JINGWEI SYSTEMTECHNIK LTD.

Address: No. 1206, Jianlan Road, Yinzhou District, 315040, NingBo China | Hotline: +86 574 87913531 87900713
 Fax: +86 574 87907580 | E-mail: sales01@jingwei.com.cn | Service hotline: 400-1000-128 | www.jweicut.com



JWEI official WeChat